

Checked to exact flatness tolerances, our extruded magnesium Allen Hand Tools are specifically designed to improve floor or pavement levelness. Each tool comes standard with three 1.8 m snap-together aluminum handles. Our hand tools are available with either the Rock-It or Equalizer pitch adjusting head for precise, even control.

Model	Tool Widths (m)	Channel/Beam Dimension
Channel Float	1.5 - 3.7	152 mm
Check Rod	2.4 - 4.9	51 x 102 mm
Bump Cutter	2.4 - 4.9	51 x 102 mm
Mesh Roller	0.46 - 1.27	



Bump Cutter: Cuts down bumps and fills low areas after concrete slab has been floated.




Check Rod: Reduces bumps and fills low areas while the concrete is still plastic.



Channel Float: Use in lieu of traditional bull float for flatter floors and pavements.



Mesh Roller: Ideal for embedding exposed aggregate and quickly levels slab and prepared it for final finish.

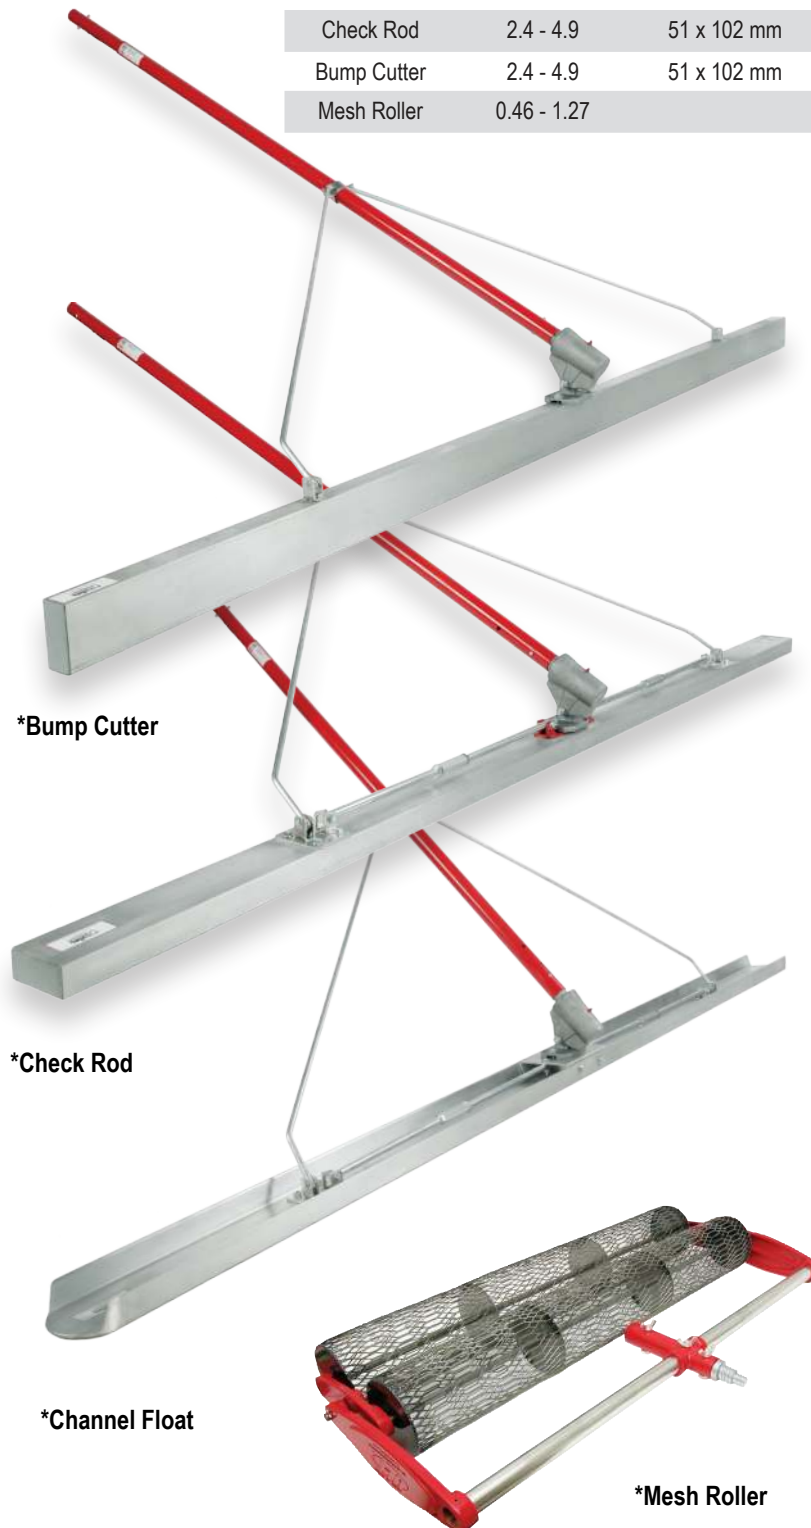

***Bump Cutter**

***Check Rod**

***Channel Float**

***Mesh Roller**